



PROFIL RSN® Rivet Nut

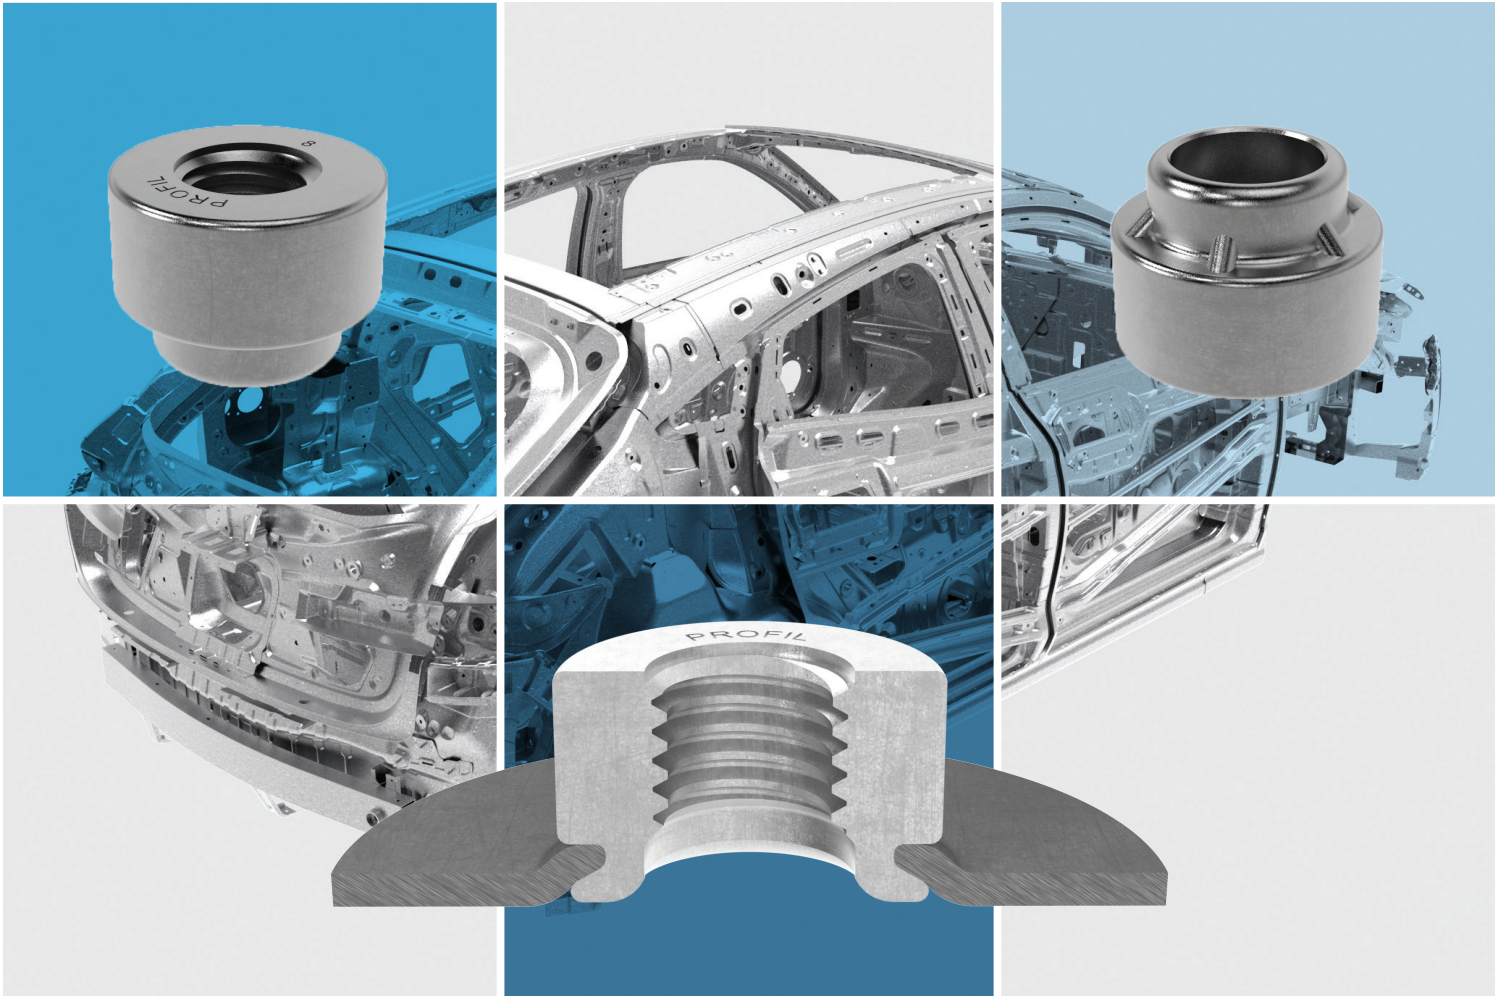

Your System Supplier for **Mechanically Attached Fasteners (MAF)**





Scan QR code for more information

PROFIL RSN® Rivet Nut

Technical Product Data Sheet

Thread size	M5 to M14
Thread tolerance	6G 6H
Property class	8 or 10
Panel thickness	From 0.6 mm to 4.0 mm
Panel tensile strength	Up to 600 MPa (Class 8 Nut) up to 1000 MPa (Class 10 Nut)
Panel preparation	Pre-pierced and pre-formed
Geometrically conforming to	DIN EN ISO 898-2:2023-02
Surface coating	OEM approved
Watertightness	Leak rate < 5 • 10 ⁻⁴ mbar • l/s (IPX7)
Thread repair	Repairable with standard wire thread inserts
Torque-out resistance	High
Push-out resistance	High
Installation methods available	Fully automated in die, Body in White (BIW), Manual

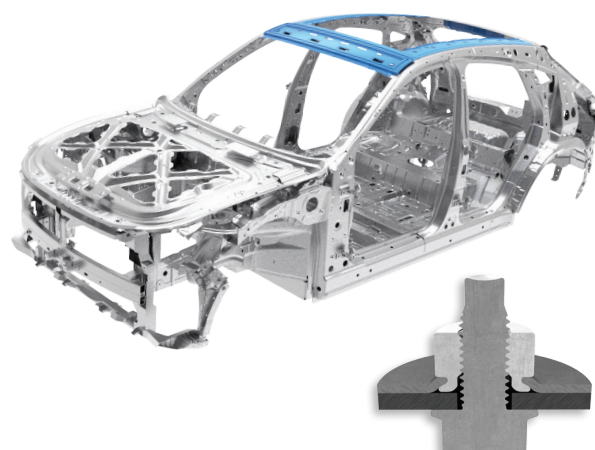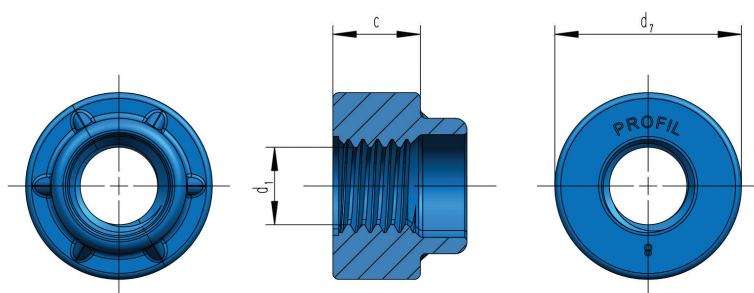

Body	RSN0608	RSN0609*		RSN08	RSN10	RSN12	RSN14
Thread d ₁	M5	M5	M6	M8	M10	M12	M14
Pitch	0.8	0.8	1.0	1.25	1.25 1.5	1.78	2.0
Panel thickness [mm]	0.6 to 3.0	0.6 to 3.0		0.8 to 3.5	1.0 to 4.0	1.0 to 4.0	1.0 to 4.0
d ₇ [mm]	12.9			16.0	19.0	23.0	26.0
c [mm]	4.8	5.5		7.5	9.6	11.5	14.0



PROFIL System Inc.
 5331 Dixie Highway
 Waterford, MI 48329 USA
 Tel: +1 248 599 3700
 Email:
sales.profil.na@pemnet.com

PROFIL Verbindungstechnik
 GmbH & Co. KG
 Otto-Hahn-Straße 22 - 24
 61381 Friedrichsdorf DE
 Tel: +49 (0) 61 75 / 79 90
 Email: info@profil.eu

PROFIL China
 1895 West Zhonghuayuan Road
 Kunshan New District
 Jiangsu Prov. 215300 China
 Tel: +86 512-5035-9080
 email: info@profil.eu